

Applying Hotfix-076394.30

This section explains how to update the code tree and database for the .NET 10 upgrade. Before applying these changes, please confirm that all required components are present.

Requirements:

- Aras Innovator 14.30.0
- Microsoft ASP.NET Core / .NET Runtime and Hosting Bundle for .NET 10
- Aras Update tool

or

- Aras Innovator Package Import Export Utilities

Notification and Backup

1. Notify users that the system will be down at a scheduled time and that they should log out before starting the process.


Important

Giving at least 24 hours' notice and a reminder 15 minutes before taking the system offline is best.

2. Back up the code tree:

The 'Code Tree' refers to files and folders installed on the disk when Aras Innovator was first installed. The default path for the Code Tree installation would be something similar to:

C:\Program Files(x86)\Aras\Innovator

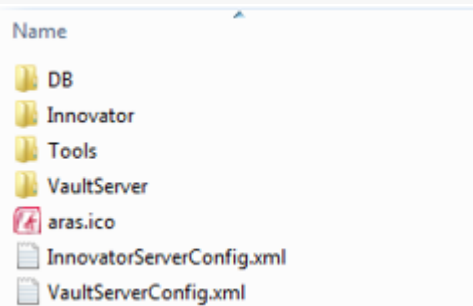

steps:

The installation folder can be confirmed with the following



1. From the **Start Menu**, click **Start** and select **Settings** and **Control Panel**.
2. From the **Control Panel**, select **Programs and Features**.
3. Search for the **Aras Innovator** entry. The entry should display the physical installation path.

Once the location of the code tree installation is determined, backup the folder and its contents.

3. Disconnect all users from the database.

The easiest way to prevent client sessions from committing any further changes to the database is to change the database connection string in the InnovatorServerConfig.xml from **<DB-Connection...** to **<xDB-Connection...** and restart the **w3svc service(IIS)**. This expires all sessions and prevents all new connections to the Aras Innovator database through the existing instance.

4. Backup the database.

Place this file in a safe location. If the application fails, it will need to be restored from there.

5. Enable database connections.

After the database backup has completed, enable the database connection string in the InnovatorServerConfig.xml by simply changing it from **<xDB-Connection...** to **<DB-Connection...** and restarting the **w3svc service (IIS)**.

Applying the Hotfix

This hotfix can be installed using one of three options: the Automated Installation Option (using the Aras Update tool), the Manual Installation Option (using the Aras Import tool), or the DevOps (SaaS) Installation Option (for container-based deployments).

Automated Installation Option


1. Extract the **Hotfix-076394.30.zip** file to a folder on the local machine.
2. Enable the **Super User** login.
3. Launch the **ArasUpdate.exe** file as administrator.

If default options were selected during installation, the **ArasUpdate.exe** file is found in the directory **C:\Program Files (x86)\Aras\Aras Update**.


4. On the **Local** tab, click **Add package reference** and navigate to the folder where the hotfix was extracted from the first step.



5. Expand the **Aras Hotfix Package to Net10** component and click **Install**.

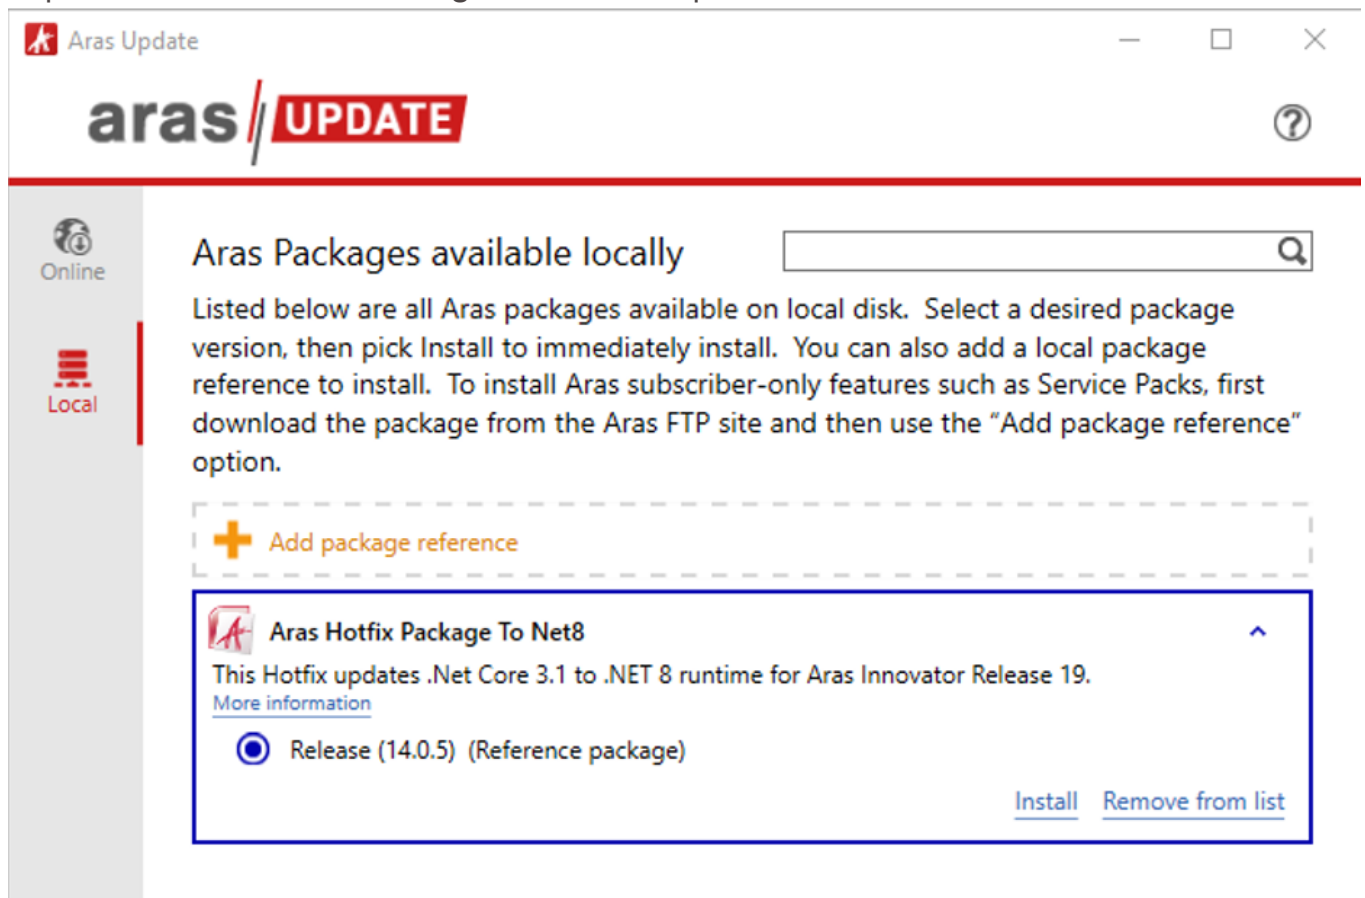

6. Select the components to which the Hotfix will be applied and click **Next**.

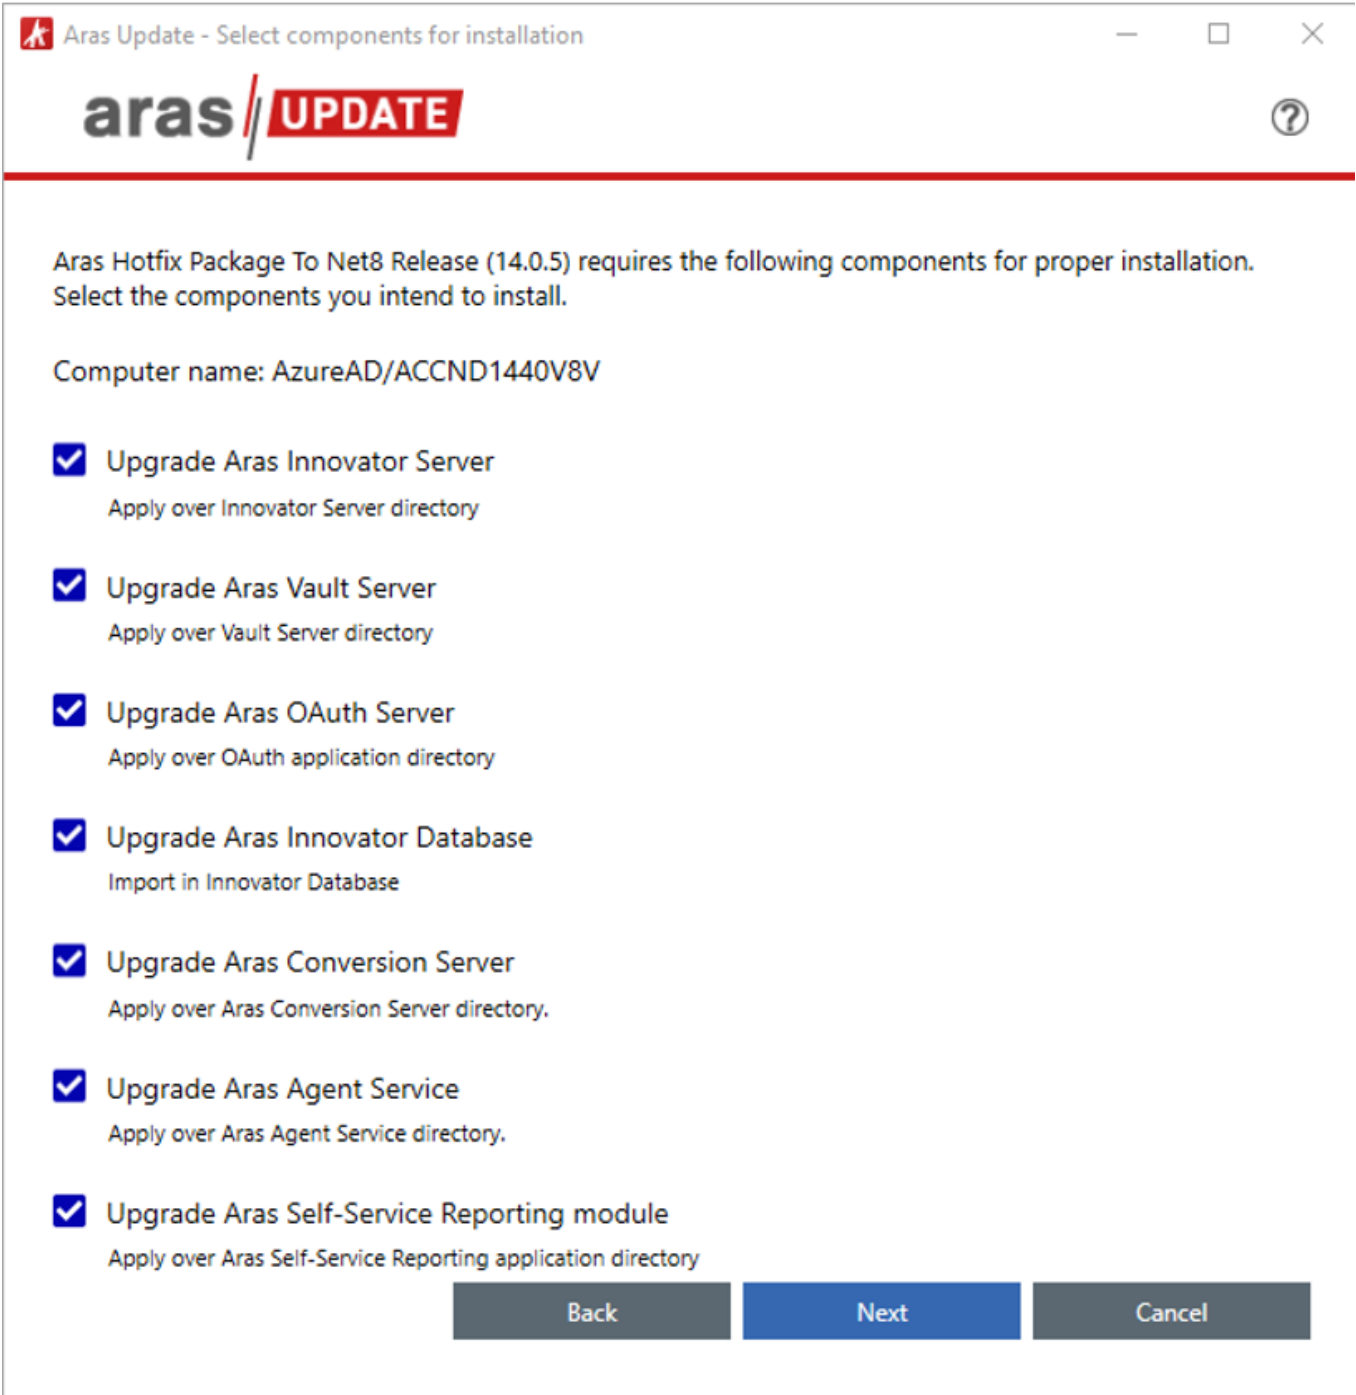

The image shows a Windows-style window titled "Aras Update - Select components for installation". The window has a red header bar with the "aras / UPDATE" logo on the left and a help icon (?) on the right. Below the header, the text reads: "Aras Hotfix Package To Net8 Release (14.0.5) requires the following components for proper installation. Select the components you intend to install." Below this, the computer name is listed as "Computer name: AzureAD/ACCND1440V8V". There are seven checkboxes, all of which are checked. Each checkbox is followed by the component name and a description of where it will be applied. At the bottom right, there are three buttons: "Back", "Next", and "Cancel".

Aras Update - Select components for installation

aras / UPDATE

Aras Hotfix Package To Net8 Release (14.0.5) requires the following components for proper installation.
Select the components you intend to install.


Computer name: AzureAD/ACCND1440V8V

- ☒ Upgrade Aras Innovator Server
Apply over Innovator Server directory
- ☒ Upgrade Aras Vault Server
Apply over Vault Server directory
- ☒ Upgrade Aras OAuth Server
Apply over OAuth application directory
- ☒ Upgrade Aras Innovator Database
Import in Innovator Database
- ☒ Upgrade Aras Conversion Server
Apply over Aras Conversion Server directory.
- ☒ Upgrade Aras Agent Service
Apply over Aras Agent Service directory.
- ☒ Upgrade Aras Self-Service Reporting module
Apply over Aras Self-Service Reporting application directory

Back Next Cancel



7. Select the **Detailed logging** option and click **Next**.

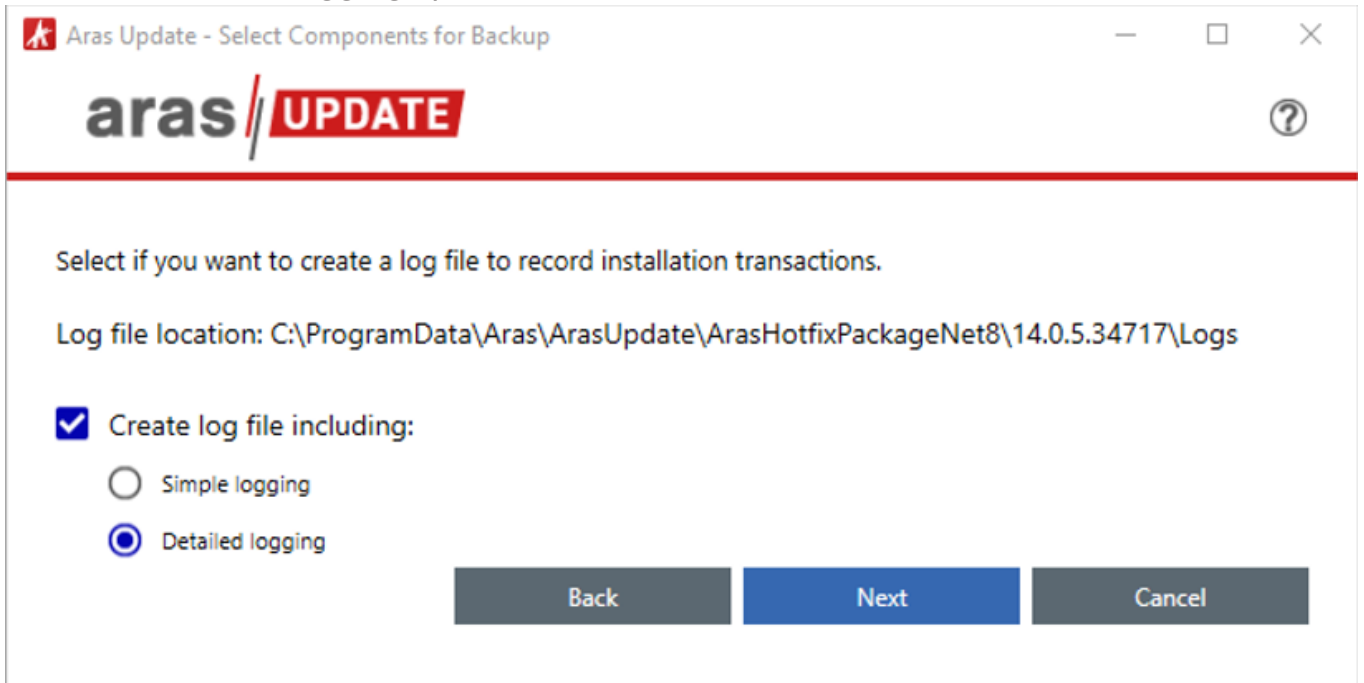

The image shows a Windows-style window titled "Aras Update - Select Components for Backup". The window has a red header bar with the "aras // UPDATE" logo on the left and a help icon (?) on the right. Below the header, the text reads: "Select if you want to create a log file to record installation transactions." followed by "Log file location: C:\ProgramData\Aras\ArasUpdate\ArasHotfixPackageNet8\14.0.5.34717\Logs". There are two radio button options: "Simple logging" (unselected) and "Detailed logging" (selected). At the bottom right, there are three buttons: "Back", "Next" (highlighted in blue), and "Cancel".

8. Fill in the appropriate **Server Path** information, **URL**, **Database**, **Username**, and **Password** for the root user, and click **Install**.

Aras Update

aras

UPDATE

?

Enter the following parameters for each component you are going to install and then click Install button to continue.

✓ Upgrade Aras Innovator Server

Path to the common directory where Aras Innovator components are installed

C:\Program Files (x86)\Aras\Innovator

Browse...

✓ Upgrade Aras Vault Server

Path to the installed Vault Server

C:\Program Files (x86)\Aras\Innovator\VaultServer

Browse...

✓ Upgrade Aras OAuth Server

Path to the installed OAuth Server

C:\Program Files (x86)\Aras\Innovator\OAuthServer

Browse...

✓ Upgrade Aras Innovator Database

Server URL

https://localhost/InnovatorServer

Database

InnovatorServer

Username

root

Password

Back

Install

Cancel

9. Disable the **Super User** login.



Manual Installation Option

1. Extract the **Hotfix-076394.30.zip** file to a folder on the local machine.
2. Before copying the updated 'Innovator' folder, delete the following files left over from the previous .NET version, if present:

Innovator\:

```
Client\bin\Google.Protobuf.dll
Client\bin\Grpc.Core.Api.dll
Client\bin\Grpc.Net.Client.dll
Client\bin\Grpc.Net.Common.dll
Client\bin\Microsoft.Win32.SystemEvents.dll
Client\bin\nefs\Microsoft.Extensions.Configuration.Abstractions.dll
Client\bin\nefs\Microsoft.Extensions.Configuration.Binder.dll
Client\bin\nefs\Microsoft.Extensions.Configuration.dll
Client\bin\nefs\Microsoft.Extensions.DependencyInjection.Abstractions.dll
Client\bin\nefs\Microsoft.Extensions.DependencyInjection.dll
Client\bin\nefs\Microsoft.Extensions.Diagnostics.Abstractions.dll
Client\bin\nefs\Microsoft.Extensions.Diagnostics.dll
Client\bin\nefs\Microsoft.Extensions.FileProviders.Abstractions.dll
Client\bin\nefs\Microsoft.Extensions.Hosting.Abstractions.dll
Client\bin\nefs\Microsoft.Extensions.Http.dll
Client\bin\nefs\Microsoft.Extensions.Logging.Abstractions.dll
Client\bin\nefs\Microsoft.Extensions.Logging.dll
Client\bin\nefs\Microsoft.Extensions.Options.ConfigurationExtensions.dll
Client\bin\nefs\Microsoft.Extensions.Options.dll
Client\bin\nefs\Microsoft.Extensions.Primitives.dll
Client\bin\nefs\System.Diagnostics.EventLog.dll
Client\bin\nefs\System.Diagnostics.PerformanceCounter.dll
Client\bin\nefs\System.Security.Cryptography.Xml.dll
Client\bin\nefs\System.Security.Permissions.dll
Client\bin\nefs\System.Windows.Extensions.dll
Client\bin\nuntimes\unix\lib\net6.0\System.Drawing.Common.dll
```



Client\bin\nuntimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
Client\bin\nuntimes\win\lib\net6.0\System.Drawing.Common.dll
Client\bin\nuntimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
Client\bin\nuntimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
Client\bin\System.Drawing.Common.dll
Client\bin\System.Security.Permissions.dll
Client\bin\System.Windows.Extensions.dll
Client\jsBundles\chunk-72T36CZA.es.js
Client\jsBundles\chunk-72T36CZA.es.js.map
Client\jsBundles\chunk-A2FR5ZKD.es.js
Client\jsBundles\chunk-A2FR5ZKD.es.js.map
Client\jsBundles\chunk-AMMAZCIK.es.js
Client\jsBundles\chunk-AMMAZCIK.es.js.map
Client\jsBundles\chunk-CTSLZ5W2.es.js
Client\jsBundles\chunk-CTSLZ5W2.es.js.map
Client\jsBundles\chunk-TXFJXBKN.es.js
Client\jsBundles\chunk-TXFJXBKN.es.js.map
Client\jsBundles\chunk-WM5K47C4.es.js
Client\jsBundles\chunk-WM5K47C4.es.js.map
Client\WebHelp\APIReferenceDotNet\Html\html\Properties_T_Aras_IOME_CheckinProgressChange
Client\WebHelp\APIReferenceDotNet\Html\html\Properties_T_Aras_IOME_DownloadFilesProgressChange
Client\WebHelp\APIReferenceDotNet\Html\html\Properties_T_Aras_IOME_UploadFilesProgressChange
Client\WebHelp\APIReferenceDotNet\Html\icons\CFW.gif
Client\WebHelp\APIReferenceDotNet\Html\icons\slMobile.gif
Client\WebHelp\APIReferenceDotNet\Html\icons\xna.gif
Client\WebHelp\APIReferenceDotNet\Html\scripts\jquery-1.11.0.min.js
Client\WebHelp\APIReferenceDotNet\Html\toc\T_Aras_IOME_CheckinProgressChange
Client\WebHelp\APIReferenceDotNet\Html\toc\T_Aras_IOME_DownloadFilesProgressChange
Client\WebHelp\APIReferenceDotNet\Html\toc\T_Aras_IOME_UploadFilesProgressChange
Client\WebHelp\APIReferenceDotNet\Html\WebKI.xml
Client\WebHelp\APIReferenceDotNet\Html\WebTOC.xml

Innovator\:



Server\bin\Google.Protobuf.dll
Server\bin\Grpc.Core.Api.dll
Server\bin\Grpc.Net.Client.dll
Server\bin\Grpc.Net.Common.dll
Server\bin\Microsoft.DotNet.PlatformAbstractions.dll
Server\bin\Microsoft.Win32.SystemEvents.dll
Server\bin\netfx\Microsoft.Bcl.AsyncInterfaces.dll
Server\bin\netfx\Microsoft.Extensions.Configuration.Abstractions.dll
Server\bin\netfx\Microsoft.Extensions.Configuration.Binder.dll
Server\bin\netfx\Microsoft.Extensions.Configuration.dll
Server\bin\netfx\Microsoft.Extensions.DependencyInjection.Abstractions.dll
Server\bin\netfx\Microsoft.Extensions.DependencyInjection.dll
Server\bin\netfx\Microsoft.Extensions.Diagnostics.Abstractions.dll
Server\bin\netfx\Microsoft.Extensions.Diagnostics.dll
Server\bin\netfx\Microsoft.Extensions.FileProviders.Abstractions.dll
Server\bin\netfx\Microsoft.Extensions.Hosting.Abstractions.dll
Server\bin\netfx\Microsoft.Extensions.Http.dll
Server\bin\netfx\Microsoft.Extensions.Logging.Abstractions.dll
Server\bin\netfx\Microsoft.Extensions.Logging.dll
Server\bin\netfx\Microsoft.Extensions.Options.ConfigurationExtensions.dll
Server\bin\netfx\Microsoft.Extensions.Options.dll
Server\bin\netfx\Microsoft.Extensions.Primitives.dll
Server\bin\netfx\System.Diagnostics.EventLog.dll
Server\bin\netfx\System.Diagnostics.PerformanceCounter.dll
Server\bin\netfx\System.Security.Cryptography.Xml.dll
Server\bin\netfx\System.Security.Permissions.dll
Server\bin\netfx\System.Windows.Extensions.dll
Server\bin\netfx\win\lib\net6.0\System.Drawing.Common.dll
Server\bin\netfx\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
Server\bin\netfx\win\lib\net6.0\System.Drawing.Common.dll
Server\bin\netfx\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
Server\bin\netfx\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
Server\bin\System.Drawing.Common.dll



3. Copy the 'Innovator' folder to the root directory where it was installed, overwriting the existing 'Innovator' folder and its contents.
4. From the root of the code tree, navigate to \Innovator\Client and edit the InnovatorClient.config file.
 1. Change the value of the filesRevision attribute. The value should be changed from std to 2, 3, 4, etc

```
<catchingModule moduleEnabled="true" filesRevision="2" />
```
 2. Save the changes to the InnovatorClient.config file and close it
5. Restart **World Wide Web Services (IIS)** on the Innovator Server machine.
6. Stop **AgentService**.
7. Before copying the updated 'AgentService' folder, delete the following files left over from the previous .NET version, if present:

```
AgentService\  
bin\Google.Protobuf.dll  
bin\Grpc.Core.Api.dll  
bin\Grpc.Net.Client.dll  
bin\Grpc.Net.Common.dll  
bin\Microsoft.DotNet.PlatformAbstractions.dll  
bin\Microsoft.Win32.SystemEvents.dll  
bin\nuntimes\unix\lib\net6.0\System.Drawing.Common.dll  
bin\nuntimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll  
bin\nuntimes\win\lib\net6.0\System.Drawing.Common.dll  
bin\nuntimes\win\lib\net8.0\System.ServiceProcess.ServiceController.dll  
bin\nuntimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll  
bin\nuntimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll  
bin\System.Drawing.Common.dll  
bin\System.Security.Permissions.dll  
bin\System.Windows.Extensions.dll
```

8. Copy the 'AgentService' folder to the root directory where the **Agent Service** was installed, overwriting the existing 'AgentService' folder and its contents.
9. Start **AgentService**.



10. Before copying the updated 'ConversionServer' folder, delete the following files left over from the previous .NET version, if present:

```
ConversionServer\  
bin\DotNetZip.dll  
bin\Google.Protobuf.dll  
bin\Grpc.Core.Api.dll  
bin\Grpc.Net.Client.dll  
bin\Grpc.Net.Common.dll  
bin\Microsoft.DotNet.PlatformAbstractions.dll  
bin\nuntimes\unix\lib\net6.0\System.Drawing.Common.dll  
bin\nuntimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll  
bin\nuntimes\win\lib\net6.0\System.Drawing.Common.dll  
bin\nuntimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll  
bin\nuntimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll  
bin\System.Security.Permissions.dll  
bin\System.Windows.Extensions.dll
```

11. Copy the 'ConversionServer' folder to the root directory where the **Conversion Server** was installed, overwriting the existing 'ConversionServer' folder and its contents.
12. Restart **World Wide Web Services (IIS)** on the Conversion Server machine.
13. Before copying the updated 'OAuthServer' folder, delete the following files left over from the previous .NET version, if present:

```
OAuthServer\  
Bin\AutoMapper.dll  
Bin\Google.Protobuf.dll  
Bin\Grpc.Core.Api.dll  
Bin\Grpc.Net.Client.dll  
Bin\Grpc.Net.Common.dll  
Bin\Microsoft.Win32.SystemEvents.dll  
Bin\nefs\Microsoft.Extensions.Configuration.Abstractions.dll  
Bin\nefs\Microsoft.Extensions.Configuration.Binder.dll  
Bin\nefs\Microsoft.Extensions.Configuration.dll
```



Bin\nefs\Microsoft.Extensions.DependencyInjection.Abstractions.dll
 Bin\nefs\Microsoft.Extensions.DependencyInjection.dll
 Bin\nefs\Microsoft.Extensions.Diagnostics.Abstractions.dll
 Bin\nefs\Microsoft.Extensions.Diagnostics.dll
 Bin\nefs\Microsoft.Extensions.FileProviders.Abstractions.dll
 Bin\nefs\Microsoft.Extensions.Hosting.Abstractions.dll
 Bin\nefs\Microsoft.Extensions.Http.dll
 Bin\nefs\Microsoft.Extensions.Logging.Abstractions.dll
 Bin\nefs\Microsoft.Extensions.Logging.dll
 Bin\nefs\Microsoft.Extensions.Options.ConfigurationExtensions.dll
 Bin\nefs\Microsoft.Extensions.Options.dll
 Bin\nefs\Microsoft.Extensions.Primitives.dll
 Bin\nefs\System.Diagnostics.EventLog.dll
 Bin\nefs\System.Diagnostics.PerformanceCounter.dll
 Bin\nefs\System.Security.Cryptography.Xml.dll
 Bin\nefs\System.Security.Permissions.dll
 Bin\nefs\System.Windows.Extensions.dll
 Bin\nuntimes\unix\lib\net6.0\System.Drawing.Common.dll
 Bin\nuntimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
 Bin\nuntimes\win\lib\net6.0\System.Drawing.Common.dll
 Bin\nuntimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
 Bin\nuntimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
 Bin\System.Drawing.Common.dll
 Bin\System.Security.Permissions.dll
 Bin\System.Windows.Extensions.dll

14. Copy the 'OAuthServer' folder to the root directory where the **OAuth Server** was installed, overwriting the existing 'OAuthServer' folder and its contents.
15. Restart **World Wide Web Services (IIS)** on the OAuth Server machine.
16. Before copying the updated 'VaultServer' folder, delete the following files left over from the previous .NET version, if present:

VaultServer\
 bin\Google.Protobuf.dll



bin\Grpc.Core.Api.dll
bin\Grpc.Net.Client.dll
bin\Grpc.Net.Common.dll
bin\Microsoft.Win32.SystemEvents.dll
bin\nuntimes\unix\lib\net6.0\System.Drawing.Common.dll
bin\nuntimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
bin\nuntimes\win\lib\net6.0\System.Drawing.Common.dll
bin\nuntimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
bin\nuntimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
bin\System.Drawing.Common.dll
bin\System.Security.Permissions.dll
bin\System.Windows.Extensions.dll

17. Copy the 'VaultServer' folder to the root directory where the **Vault Server** was installed, overwriting the existing 'VaultServer' folder and its contents.
18. Restart **World Wide Web Services (IIS)** on the Vault Server machine.
19. Import the database package with the **Package Import Utility**. For more information on using this tool, refer to the *Aras Innovator - Package Import Export Utilities* document.



The screenshot shows the 'Import' application window. The 'Innovator Server' section has the 'Server' field set to 'https://localhost/InnovatorServer' and a 'Logout' button. The 'Release settings' section has 'Target Release' set to 'R19' and 'Description' set to 'Hotfix-069599.00'. The 'Manifest File' section has the 'Path' field set to 'C:\Aras downloads\HotFixes\Hotfix-069599\Imports\imports.mf'. The bottom section is divided into three panels: 'Available for Import' with 'Select All Packages' and 'DatabaseIdentifier' checked; 'Language codes' with 'en' checked; and 'Existing Packages in the Database' with a list of package names and a 'Type' section with 'Merge' selected and a 'Mode' section with 'Thorough Mode' selected.

1. Enable the **Super User** login to perform this step.
2. Browse to the \PackageImportExportUtilities\Import\ folder and run the **Import.exe** file
3. Input the following connection information:
 - **Server** = The connection URL for Aras Innovator
 - **Database** = The target Aras Innovator database
 - **Username** = root
 - **Password** = Password for “root” login (Default is “innovator”)
 - **Target Release** = R33
 - **Description** = Hotfix-076394.30
 - **Manifest File Path** = The manifest imports.mf is found in the folder Imports\
 - **Available for Import** = Select All
 - **Type** = Merge
 - **Mode** = Thorough Mode
4. Click the **Import** button
5. Disable the **Super User** login once complete.



Important

The **Super User** login should not be enabled in production.

DevOps (SaaS) Installation option

This option applies to Aras Innovator deployments that run as containers in a DevOps environment, also referred to as SaaS. In these deployments, the hotfix is not applied to an existing code tree on disk. Instead, the environment is updated to use a container image built on the .NET 10 base image, and the database package is applied to the target database.

This hotfix is published as a versioned container image identified by the build version *14.30.0-msbuild.76394*. The image is built on the .NET 10 base image and includes the recompiled net10.0 platform components.

Important

Aras DevOps administrators or contributors must have an installed Aras Innovator instance before following these steps. It is recommended that administrators read the Aras DevOps – User Guide included in the Build and Deployment Service package, which explains how to use the Aras DevOps service to manage Aras Innovator customizations throughout the implementation lifecycle.

Important

Because hotfix moves the platform to .NET 10, any custom server-side code, methods, or plugins included in the container image must be rebuilt against net10.0 before deployment. Review the items in Section 4 before deploying them to a production SaaS environment.

The high-level steps to apply the hotfix in a DevOps (SaaS) environment are as follows:

Edit the Configuration File

1. In your local Build and Deployment Service package repository, open the file `packages.config` from the folder `AutomatedProcedures/tools` for editing.
2. Find and update the Innovator version number to the one for **Release 33 (14.30.0)**.
3. Update the following values in `packages.config` according to the Release 33 patch being applied:

Field	Variable Value
-------	----------------



Baseline Number	14.30.0.46056- msbuild.76394
Aras.Crt.InnovatorConfigs	14.30.0.46056
Aras.IOM	14.30.0.46056

Important

Refer to the Innovator Baselines article for the current list of Innovator version numbers and baseline values.

Run the Generate Baseline Pipeline

Run the Generate Baseline pipeline to produce the patched baseline for the updated configuration.

Deployment to Environment

Follow your standard procedure to deploy the patch release to the target environment, then retrieve and apply the database package:

1. Log on to the [Aras File Sharing Site](#) .
2. Navigate to the folder: **Aras / Product Releases - Internal / Innovator Builds / Released / Release 33** .
3. Download the Aras Innovator Patch Release 33 CD Image archive.
4. Unzip the archive on the local machine in a new folder and locate the Imports subfolder.
5. Apply the AML packages included in the Imports subfolder.

After deployment, verify the installation as described in *Confirming the Installation*.

Confirming the Installation

After applying hotfix using any of the installation options above, use the following steps to verify that the database has correctly applied the updates to Aras Innovator.

1. Start **IIS**.
2. Log in to **Aras Innovator** as an administrator.
3. From the **Help** menu, select **About**.
4. Confirm that the window shows the following:
 - MSBuild Number 076394.30
5. Navigate to **Administration\Variables** in the Table of Contents.
6. Confirm the following Variable is shown:



Variable Name	Variable Value
MSBuildNumber	076394.30

If the installation fails at any time, revert to backups and contact Aras Support at [Aras Subscriber Portal](#) .

