

Applying Hotfix-076394.37

This section explains how to update the code tree and database for the .NET 10 upgrade. Before applying these changes, please confirm that all required components are present.

Requirements:

- Aras Innovator 14.37.0
- Microsoft ASP.NET Core / .NET Runtime and Hosting Bundle for .NET 10
- Aras Update tool

or

- Aras Innovator Package Import Export Utilities

Notification and Backup

1. Notify users that the system will be down at a scheduled time and that they should log out before starting the process.


Important

Giving at least 24 hours' notice and a reminder 15 minutes before taking the system offline is best.

2. Back up the code tree:

The 'Code Tree' refers to files and folders installed on the disk when Aras Innovator was first installed. The default path for the Code Tree installation would be something similar to:

C:\Program Files(x86)\Aras\Innovator

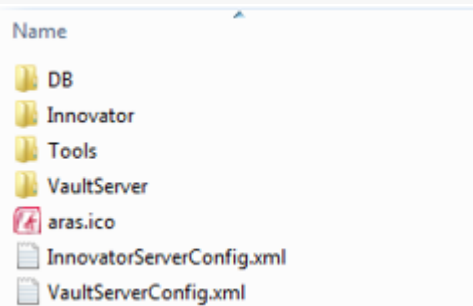

steps:

The installation folder can be confirmed with the following



1. From the **Start Menu**, click **Start** and select **Settings** and **Control Panel**.
2. From the **Control Panel**, select **Programs and Features**.
3. Search for the **Aras Innovator** entry. The entry should display the physical installation path.

Once the location of the code tree installation is determined, backup the folder and its contents.

3. Disconnect all users from the database.

The easiest way to prevent client sessions from committing any further changes to the database is to change the database connection string in the InnovatorServerConfig.xml from **<DB-Connection...** to **<xDB-Connection...** and restart the **w3svc service(IIS)**. This expires all sessions and prevents all new connections to the Aras Innovator database through the existing instance.

4. Backup the database.

Place this file in a safe location. If the application fails, it will need to be restored from there.

5. Enable database connections.

After the database backup has completed, enable the database connection string in the InnovatorServerConfig.xml by simply changing it from **<xDB-Connection...** to **<DB-Connection...** and restarting the **w3svc service (IIS)**.

Applying the Hotfix

This hotfix can be installed using one of three options: the Automated Installation Option (using the Aras Update tool), the Manual Installation Option (using the Aras Import tool), or the DevOps (SaaS) Installation Option (for container-based deployments).


Automated Installation Option

1. Enable the **Super User** login.
2. Launch the **ArasUpdate.exe** file as administrator.

If default options were selected during installation, the **ArasUpdate.exe** file is found in the directory **C:\Program Files (x86)\Aras\Aras Update**.

3. On the **Local** tab, locate the hotfix package obtained in *Hotfix Patch* section in Prerequisites under **Local Packages**.



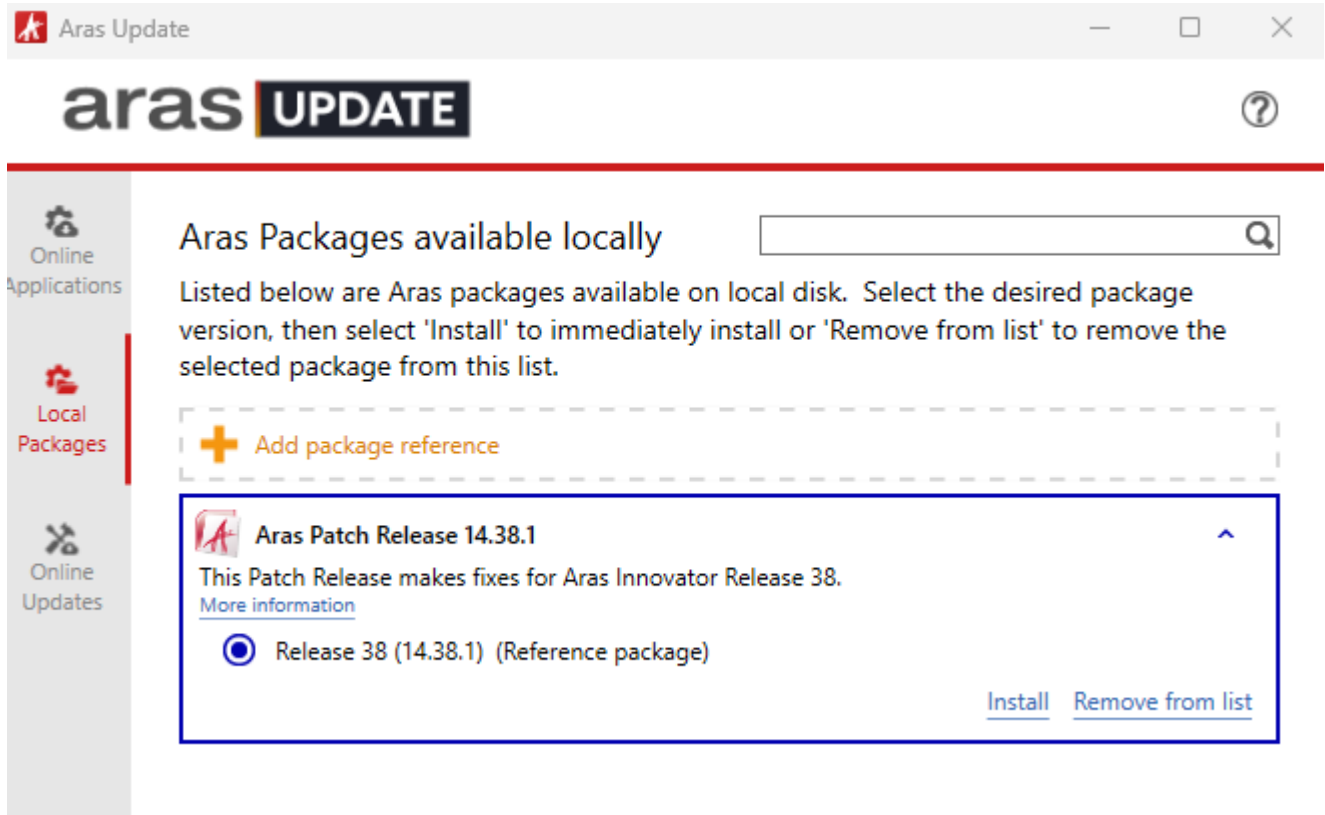

The screenshot shows the 'Aras Update' application window. The title bar reads 'Aras Update'. The main header features the 'aras UPDATE' logo and a help icon. A left sidebar contains three navigation options: 'Online Applications' (with a puzzle piece icon), 'Local Packages' (with a red puzzle piece icon and a red vertical highlight), and 'Online Updates' (with a puzzle piece and X icon). The main content area is titled 'Aras Packages available locally' and includes a search bar. Below the title, a text block states: 'Listed below are Aras packages available on local disk. Select the desired package version, then select 'Install' to immediately install or 'Remove from list' to remove the selected package from this list.' A dashed box contains a '+ Add package reference' button. Below this, a package entry for 'Aras Patch Release 14.38.1' is shown, which is expanded. The entry includes a description: 'This Patch Release makes fixes for Aras Innovator Release 38.' with a 'More information' link. A radio button is selected next to 'Release 38 (14.38.1) (Reference package)'. At the bottom right of the package entry are 'Install' and 'Remove from list' links.

4. Expand the **Aras Hotfix Package to Net10** component and click **Install**.



5. Select the components to which the Hotfix will be applied and click **Next**.

 Aras Update - Select components for installation

 **UPDATE** 

Aras Patch Release 14.38.1 Release 38 (14.38.1) requires the following components for proper installation. Select the components you intend to install.

Computer name:

- ☒ Upgrade Aras Innovator Server
Apply over Innovator Server directory
- ☒ Upgrade Aras Vault Server
Apply over Vault Server directory
- ☒ Upgrade Aras OAuth Server
Apply over OAuth application directory
- ☒ Upgrade Aras Innovator Database
Import in Innovator Database
- ☒ Upgrade Aras Conversion Server
Apply over Aras Conversion Server directory.
- ☒ Upgrade Aras Agent Service
Apply over Aras Agent Service directory.


Back

Next

Cancel



6. Select the **Detailed logging** option and click **Next**.

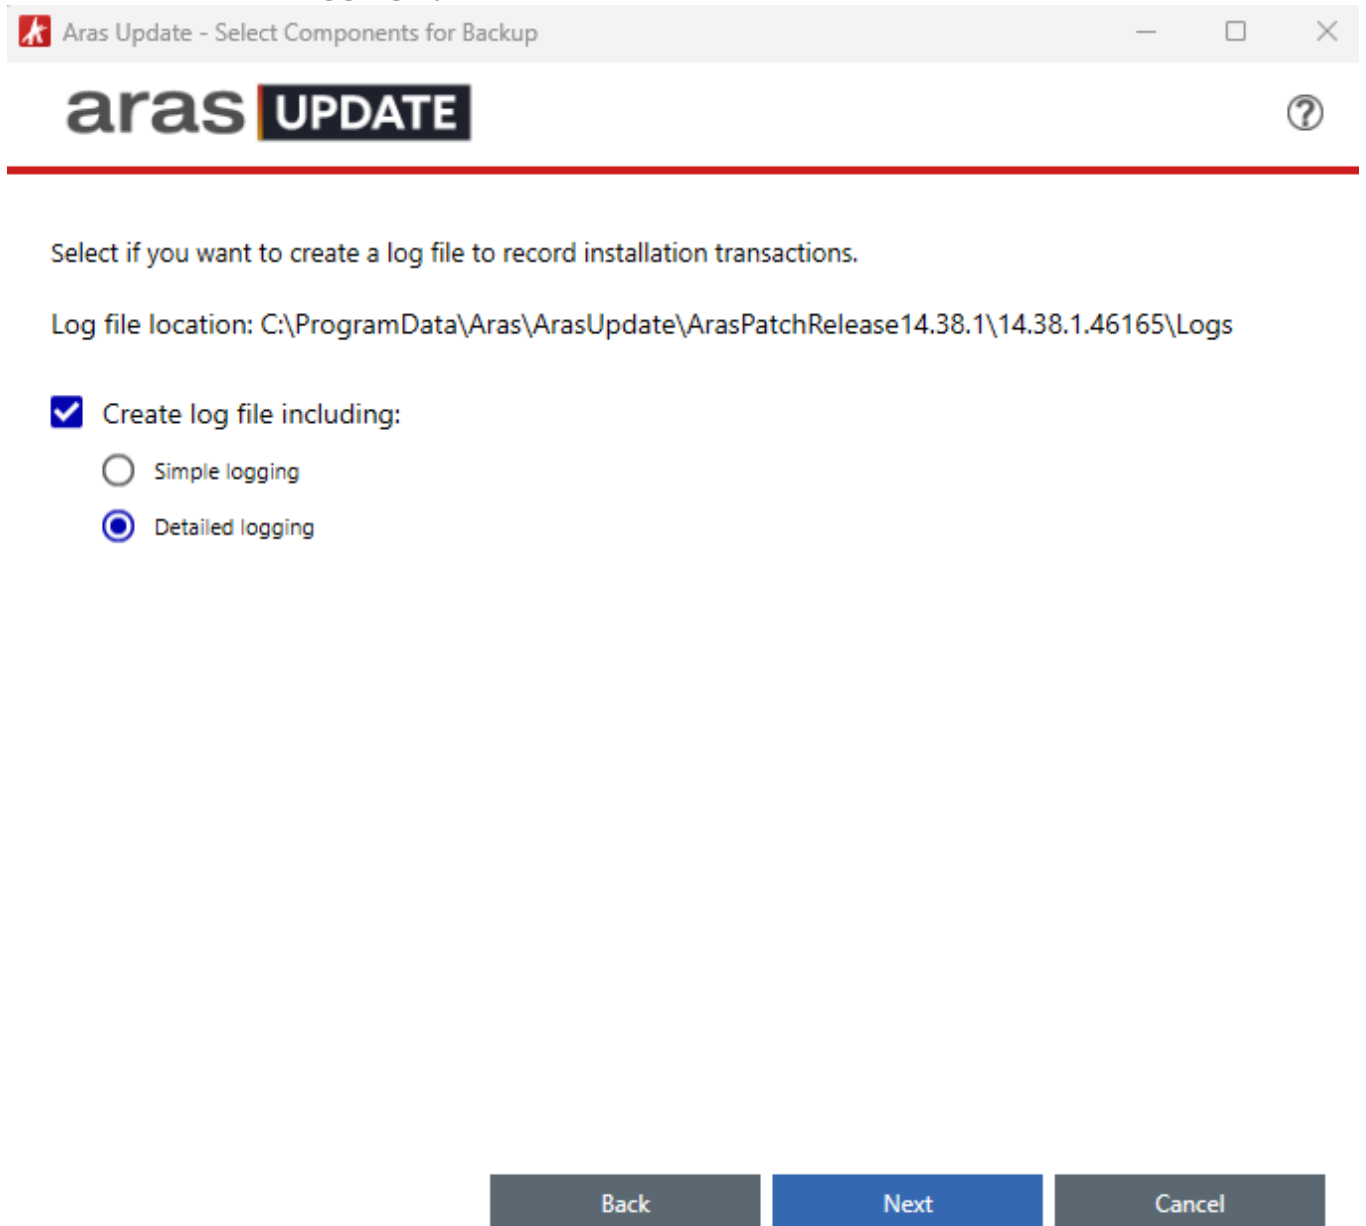

Aras Update - Select Components for Backup

aras UPDATE

Select if you want to create a log file to record installation transactions.

Log file location: C:\ProgramData\Aras\ArasUpdate\ArasPatchRelease14.38.1\14.38.1.46165\Logs

☒ Create log file including:

☐ Simple logging

☒ Detailed logging

Back Next Cancel

7. Fill in the appropriate **Server Path** information, **URL**, **Database**, **Username**, and **Password** for the root user, and click **Install**.

Aras Update

aras UPDATE

Enter the following parameters for each component you are going to install and then click Install button to continue.

✓ Upgrade Aras OAuth Server

✓ Upgrade Aras Innovator Database

Server URL
http://acjc37ln3/R14.38.0

Database
R14.38.0

Username
root

Password

✓ Upgrade Aras Conversion Server

Back Install Cancel

8. Disable the **Super User** login.

Manual Installation Option

1. Obtain the Hotfix-076394.37 package as described in Hotfix Patch, then extract it to a folder on the local machine.
2. Before copying the updated 'Innovator' folder, delete the following files left over from the previous .NET version, if present:

Innovator\Client:

Client\bin\Google.Protobuf.dll
Client\bin\Grpc.Core.Api.dll
Client\bin\Grpc.Net.Client.dll
Client\bin\Grpc.Net.Common.dll
Client\bin\Microsoft.Win32.SystemEvents.dll
Client\bin\refs\Microsoft.Extensions.Configuration.Abstractions.dll
Client\bin\refs\Microsoft.Extensions.Configuration.Binder.dll
Client\bin\refs\Microsoft.Extensions.Configuration.dll
Client\bin\refs\Microsoft.Extensions.DependencyInjection.Abstractions.dll
Client\bin\refs\Microsoft.Extensions.DependencyInjection.dll
Client\bin\refs\Microsoft.Extensions.Diagnostics.Abstractions.dll
Client\bin\refs\Microsoft.Extensions.Diagnostics.dll
Client\bin\refs\Microsoft.Extensions.FileProviders.Abstractions.dll
Client\bin\refs\Microsoft.Extensions.Hosting.Abstractions.dll
Client\bin\refs\Microsoft.Extensions.Http.dll
Client\bin\refs\Microsoft.Extensions.Logging.Abstractions.dll
Client\bin\refs\Microsoft.Extensions.Logging.dll
Client\bin\refs\Microsoft.Extensions.Options.ConfigurationExtensions.dll
Client\bin\refs\Microsoft.Extensions.Options.dll
Client\bin\refs\Microsoft.Extensions.Primitives.dll
Client\bin\refs\System.Diagnostics.EventLog.dll
Client\bin\refs\System.Diagnostics.PerformanceCounter.dll
Client\bin\refs\System.Security.Cryptography.Xml.dll
Client\bin\refs\System.Security.Permissions.dll
Client\bin\refs\System.Windows.Extensions.dll
Client\bin\runtimes\unix\lib\net6.0\System.Drawing.Common.dll
Client\bin\runtimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
Client\bin\runtimes\win\lib\net6.0\System.Drawing.Common.dll
Client\bin\runtimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
Client\bin\runtimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
Client\bin\System.Drawing.Common.dll
Client\bin\System.Security.Permissions.dll
Client\bin\System.Windows.Extensions.dll



Client\jsBundles\chunk-CYR24YHC.es.js
Client\jsBundles\chunk-CYR24YHC.es.js.map
Client\jsBundles\chunk-GV4E6MR3.es.js
Client\jsBundles\chunk-GV4E6MR3.es.js.map
Client\jsBundles\chunk-K2SH5HFQ.es.js
Client\jsBundles\chunk-K2SH5HFQ.es.js.map
Client\jsBundles\chunk-LFN7KUHW.es.js
Client\jsBundles\chunk-LFN7KUHW.es.js.map
Client\jsBundles\chunk-LTW6UT0J.es.js
Client\jsBundles\chunk-LTW6UT0J.es.js.map
Client\jsBundles\chunk-NVDHYYJA.es.js
Client\jsBundles\chunk-NVDHYYJA.es.js.map
Client\jsBundles\chunk-QGEEC5T3.es.js
Client\jsBundles\chunk-QGEEC5T3.es.js.map
Client\WebHelp\APIReferenceDotNet\Html\html\Properties_T_Aras_IOME_CheckinProgressChange
Client\WebHelp\APIReferenceDotNet\Html\html\Properties_T_Aras_IOME_DownloadFilesProgressChange
Client\WebHelp\APIReferenceDotNet\Html\html\Properties_T_Aras_IOME_UploadFilesProgressChange
Client\WebHelp\APIReferenceDotNet\Html\icons\CFW.gif
Client\WebHelp\APIReferenceDotNet\Html\icons\slMobile.gif
Client\WebHelp\APIReferenceDotNet\Html\icons\xna.gif
Client\WebHelp\APIReferenceDotNet\Html\scripts\jquery-1.11.0.min.js
Client\WebHelp\APIReferenceDotNet\Html\toc\T_Aras_IOME_CheckinProgressChange
Client\WebHelp\APIReferenceDotNet\Html\toc\T_Aras_IOME_DownloadFilesProgressChange
Client\WebHelp\APIReferenceDotNet\Html\toc\T_Aras_IOME_UploadFilesProgressChange
Client\WebHelp\APIReferenceDotNet\Html\WebKI.xml
Client\WebHelp\APIReferenceDotNet\Html\WebTOC.xml

Innovator\Server:

Server\bin\Google.Protobuf.dll
Server\bin\Grpc.Core.Api.dll
Server\bin\Grpc.Net.Client.dll
Server\bin\Grpc.Net.Common.dll
Server\bin\Microsoft.DotNet.PlatformAbstractions.dll



Server\bin\Microsoft.Win32.SystemEvents.dll
Server\bin\refs\Microsoft.Bcl.AsyncInterfaces.dll
Server\bin\refs\Microsoft.Extensions.Configuration.Abstractions.dll
Server\bin\refs\Microsoft.Extensions.Configuration.Binder.dll
Server\bin\refs\Microsoft.Extensions.Configuration.dll
Server\bin\refs\Microsoft.Extensions.DependencyInjection.Abstractions.dll
Server\bin\refs\Microsoft.Extensions.DependencyInjection.dll
Server\bin\refs\Microsoft.Extensions.Diagnostics.Abstractions.dll
Server\bin\refs\Microsoft.Extensions.Diagnostics.dll
Server\bin\refs\Microsoft.Extensions.FileProviders.Abstractions.dll
Server\bin\refs\Microsoft.Extensions.Hosting.Abstractions.dll
Server\bin\refs\Microsoft.Extensions.Http.dll
Server\bin\refs\Microsoft.Extensions.Logging.Abstractions.dll
Server\bin\refs\Microsoft.Extensions.Logging.dll
Server\bin\refs\Microsoft.Extensions.Options.ConfigurationExtensions.dll
Server\bin\refs\Microsoft.Extensions.Options.dll
Server\bin\refs\Microsoft.Extensions.Primitives.dll
Server\bin\refs\System.Diagnostics.EventLog.dll
Server\bin\refs\System.Diagnostics.PerformanceCounter.dll
Server\bin\refs\System.Security.Cryptography.Xml.dll
Server\bin\refs\System.Security.Permissions.dll
Server\bin\refs\System.Windows.Extensions.dll
Server\bin\runtimes\unix\lib\net6.0\System.Drawing.Common.dll
Server\bin\runtimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
Server\bin\runtimes\win\lib\net6.0\System.Drawing.Common.dll
Server\bin\runtimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
Server\bin\runtimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
Server\bin\System.Drawing.Common.dll

3. Copy the 'Innovator' folder to the root directory where it was installed, overwriting the existing 'Innovator' folder and its contents.
4. From the root of the code tree, navigate to \Innovator\Client and edit the InnovatorClient.config file.



1. Change the value of the filesRevision attribute. The value should be changed from std to 2, 3, 4, etc

```
<キャッシングModule moduleEnabled="true" filesRevision="2" />
```

2. Save the changes to the `InnovatorClient.config` file and close it
5. Restart **World Wide Web Services (IIS)** on the Innovator Server machine.
6. Stop **AgentService**.
7. Before copying the updated 'AgentService' folder, delete the following files left over from the previous .NET version, if present:

```
bin\Google.Protobuf.dll
```

```
bin\Grpc.Core.Api.dll
```

```
bin\Grpc.Net.Client.dll
```

```
bin\Grpc.Net.Common.dll
```

```
bin\Microsoft.DotNet.PlatformAbstractions.dll
```

```
bin\Microsoft.Win32.SystemEvents.dll
```

```
bin\runtimes\unix\lib\net6.0\System.Drawing.Common.dll
```

```
bin\runtimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
```

```
bin\runtimes\win\lib\net6.0\System.Drawing.Common.dll
```

```
bin\runtimes\win\lib\net8.0\System.ServiceProcess.ServiceController.dll
```

```
bin\runtimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
```

```
bin\runtimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
```

```
bin\System.Drawing.Common.dll
```

```
bin\System.Security.Permissions.dll
```

```
bin\System.Windows.Extensions.dll
```

8. Copy the 'AgentService' folder to the root directory where the **Agent Service** was installed, overwriting the existing 'AgentService' folder and its contents.
9. Start **AgentService**.
10. Before copying the updated 'ConversionServer' folder, delete the following files left over from the previous .NET version, if present:

```
bin\DotNetZip.dll
```

```
bin\Google.Protobuf.dll
```



bin\Grpc.Core.Api.dll
bin\Grpc.Net.Client.dll
bin\Grpc.Net.Common.dll
bin\Microsoft.DotNet.PlatformAbstractions.dll
bin\runtimes\unix\lib\net6.0\System.Drawing.Common.dll
bin\runtimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
bin\runtimes\win\lib\net6.0\System.Drawing.Common.dll
bin\runtimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
bin\runtimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
bin\System.Security.Permissions.dll
bin\System.Windows.Extensions.dll

11. Copy the 'ConversionServer' folder to the root directory where the **Conversion Server** was installed, overwriting the existing 'ConversionServer' folder and its contents.
12. Restart **World Wide Web Services (IIS)** on the Conversion Server machine.
13. Before copying the updated 'OAuthServer' folder, delete the following files left over from the previous .NET version, if present:

OAuthServer\bin\Google.Protobuf.dll
Bin\AutoMapper.dll
Bin\Google.Protobuf.dll
Bin\Grpc.Core.Api.dll
Bin\Grpc.Net.Client.dll
Bin\Grpc.Net.Common.dll
Bin\Microsoft.Win32.SystemEvents.dll
Bin\refs\Microsoft.Extensions.Configuration.Abstractions.dll
Bin\refs\Microsoft.Extensions.Configuration.Binder.dll
Bin\refs\Microsoft.Extensions.Configuration.dll
Bin\refs\Microsoft.Extensions.DependencyInjection.Abstractions.dll
Bin\refs\Microsoft.Extensions.DependencyInjection.dll
Bin\refs\Microsoft.Extensions.Diagnostics.Abstractions.dll
Bin\refs\Microsoft.Extensions.Diagnostics.dll
Bin\refs\Microsoft.Extensions.FileProviders.Abstractions.dll
Bin\refs\Microsoft.Extensions.Hosting.Abstractions.dll



```

Bin\refs\Microsoft.Extensions.Http.dll
Bin\refs\Microsoft.Extensions.Logging.Abstractions.dll
Bin\refs\Microsoft.Extensions.Logging.dll
Bin\refs\Microsoft.Extensions.Options.ConfigurationExtensions.dll
Bin\refs\Microsoft.Extensions.Options.dll
Bin\refs\Microsoft.Extensions.Primitives.dll
Bin\refs\System.Diagnostics.EventLog.dll
Bin\refs\System.Diagnostics.PerformanceCounter.dll
Bin\refs\System.Security.Cryptography.Xml.dll
Bin\refs\System.Security.Permissions.dll
Bin\refs\System.Windows.Extensions.dll
Bin\runtimes\unix\lib\net6.0\System.Drawing.Common.dll
Bin\runtimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
Bin\runtimes\win\lib\net6.0\System.Drawing.Common.dll
Bin\runtimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
Bin\runtimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
Bin\System.Drawing.Common.dll
Bin\System.Security.Permissions.dll
Bin\System.Windows.Extensions.dll

```

14. Copy the 'OAuthServer' folder to the root directory where the **OAuth Server** was installed, overwriting the existing 'OAuthServer' folder and its contents.
15. Restart **World Wide Web Services (IIS)** on the OAuth Server machine.
16. Before copying the updated 'VaultServer' folder, delete the following files left over from the previous .NET version, if present:

```


bin\Google.Protobuf.dll
bin\Grpc.Core.Api.dll
bin\Grpc.Net.Client.dll
bin\Grpc.Net.Common.dll
bin\Microsoft.Win32.SystemEvents.dll
bin\runtimes\unix\lib\net6.0\System.Drawing.Common.dll
bin\runtimes\win\lib\net6.0\Microsoft.Win32.SystemEvents.dll
bin\runtimes\win\lib\net6.0\System.Drawing.Common.dll

```



```
bin\runtimes\win\lib\netcoreapp2.0\System.Diagnostics.PerformanceCounter.dll
bin\runtimes\win\lib\netcoreapp3.0\System.Windows.Extensions.dll
bin\System.Drawing.Common.dll
bin\System.Security.Permissions.dll
bin\System.Windows.Extensions.dll
```

17. Copy the 'VaultServer' folder to the root directory where the **Vault Server** was installed, overwriting the existing 'VaultServer' folder and its contents.
18. Restart **World Wide Web Services (IIS)** on the Vault Server machine.
19. Import the database package with the **Package Import Utility**. For more information on using this tool, refer to the *Aras Innovator - Package Import Export Utilities* document.

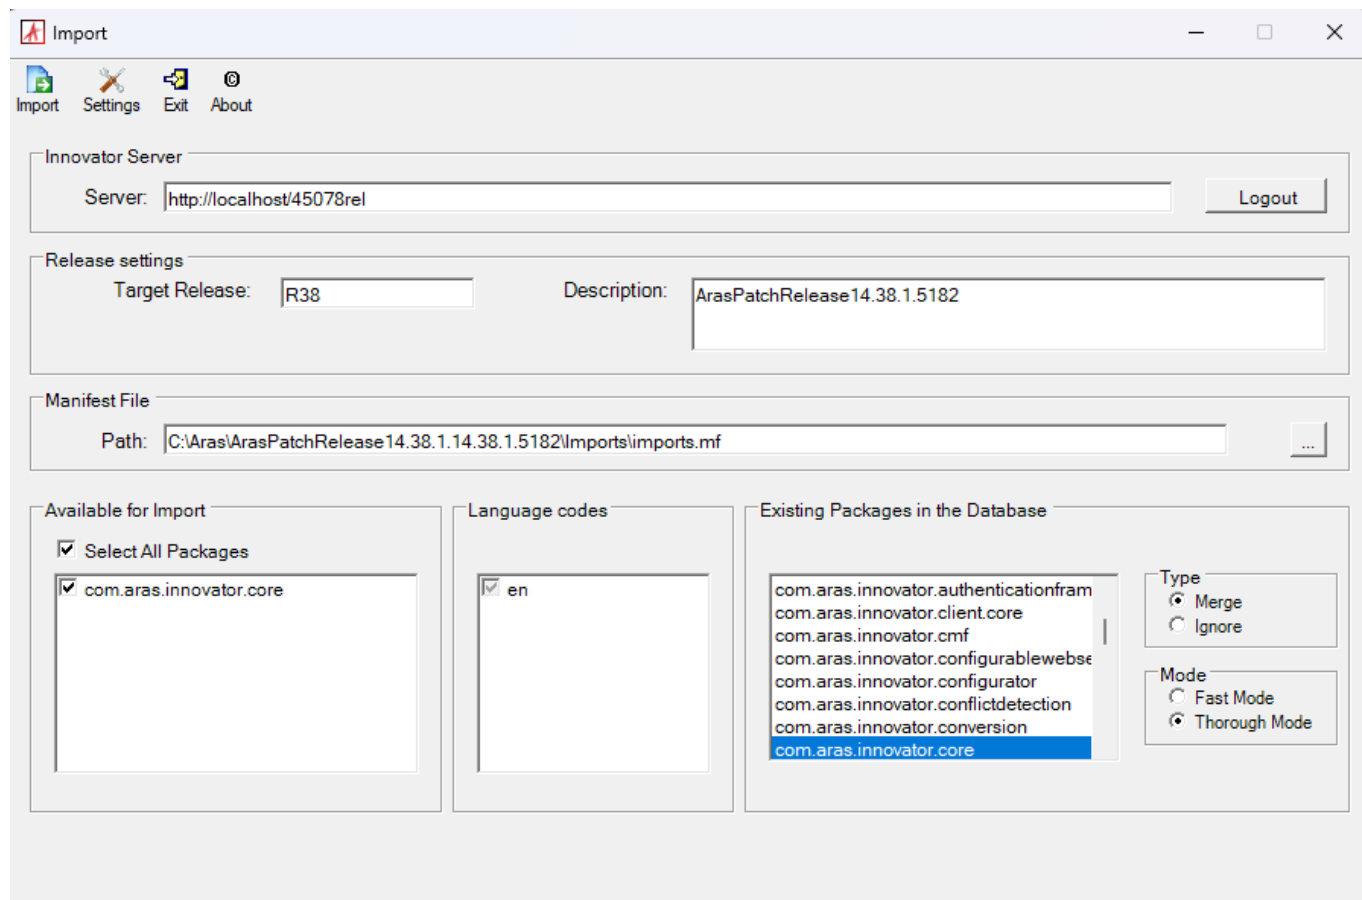

1. Enable the **Super User** login to perform this step.
2. Browse to the \PackageImportExportUtilities\Import\ folder and run the **Import.exe** file
3. Input the following connection information:

- **Server** = The connection URL for Aras Innovator
- **Database** = The target Aras Innovator database
- **Username** = root
- **Password** = Password for “root” login (Default is “innovator”)
- **Target Release** = R37
- **Description** = Hotfix-076394.37
- **Manifest File Path** = The manifest imports.mf is found in the folder Imports\
- **Available for Import** = Select All
- **Type** = Merge
- **Mode** = Thorough Mode

4. Click the **Import** button

5. Disable the **Super User** login once complete.

Important

The **Super User** login should not be enabled in production.

DevOps (SaaS) Installation option

This option applies to Aras Innovator deployments that run as containers in a DevOps environment, also referred to as SaaS. In these deployments, the hotfix is not applied to an existing code tree on disk. Instead, the environment is updated to use a container image built on the .NET 10 base image, and the database package is applied to the target database.

This hotfix is published as a versioned container image identified by the build version *14.37.0-msbuild.76394*. The image is built on the .NET 10 base image and includes the recompiled net10.0 platform components.

Important

Aras DevOps administrators or contributors must have an installed Aras Innovator instance before following these steps. It is recommended that administrators read the Aras DevOps – User Guide included in the Build and Deployment Service package, which explains how to use the Aras DevOps service to manage Aras Innovator customizations throughout the implementation lifecycle.

Important



Because hotfix moves the platform to .NET 10, any custom server-side code, methods, or plugins included in the container image must be rebuilt against net10.0 before deployment. Review the items in Section 4 before deploying them to a production SaaS environment.

The high-level steps to apply the hotfix in a DevOps (SaaS) environment are as follows:

Edit the Configuration File

1. In your local Build and Deployment Service package repository, open the file `packages.config` from the folder `AutomatedProcedures/tools` for editing.
2. Find and update the Innovator version number to the one for **Release 37 (14.37.0)**.
3. Update the following values in `packages.config` according to the Release 37 patch being applied:

Field	Variable Value
Baseline Number	14.37.0.46283-msbuild.76394
Aras.Crt.InnovatorConfigs	14.37.0.46283
Aras.IOM	14.37.0.46283

Important

Refer to the Innovator Baselines article for the current list of Innovator version numbers and baseline values.

Run the Generate Baseline Pipeline

Run the Generate Baseline pipeline to produce the patched baseline for the updated configuration.

Deployment to Environment

Follow your standard procedure to deploy the patch release to the target environment, then retrieve and apply the database package:

1. Log on to the [Aras File Sharing Site](#).
2. Navigate to the folder: `Aras / Product Releases - Internal / Innovator Builds / Released / Release 37`.
3. Download the Aras Innovator Patch Release 37 CD Image archive.
4. Unzip the archive on the local machine in a new folder and locate the Imports subfolder.
5. Apply the AML packages included in the Imports subfolder.



After deployment, verify the installation as described in *Confirming the Installation*.

Confirming the Installation

After applying hotfix using any of the installation options above, use the following steps to verify that the database has correctly applied the updates to Aras Innovator.

1. Start **IIS**.
2. Log in to **Aras Innovator** as an administrator.
3. From the **Help** menu, select **About**.
4. Confirm that the window shows the following:
 - MSBuild Number 076394.37
5. Navigate to **Administration\Variables** in the Table of Contents.
6. Confirm the following Variable is shown:

Variable Name	Variable Value
MSBuildNumber	076394.37

If the installation fails at any time, revert to backups and contact Aras Support at [Aras Subscriber Portal](#) .

